




Cold Planer

- Planetary drive delivers high torque
- High rear spoil clearance to prevent recirculation of material
- Convenient for milling frost heaves, expansion joints, railroad approaches, and general asphalt maintenance
- Front access panel allows easy inspection and replacement of cutting picks
- Pick maintenance tool included and stowed with the cold planer
- 14-pin electrical control harness
- Independent left and right depth adjustments allow for precise cuts
- Diverter valve allows the operator to switch between hydraulic side-shift and hydraulic tilt functions
- Solid hardened steel guide wheels
- Angled spoil guard prevents guide wheels from riding up and over millings for a more consistent cut
- 1 Year Limited Warranty

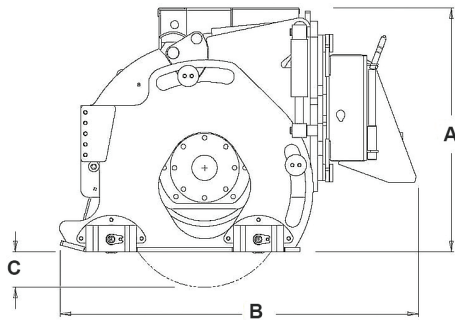

SPECIFICATIONS	12"	18" HF	24" HF	30" HF	40" HF
Hydraulic Flow Requirement	12-22 gpm	22-40 gpm	22-40 gpm	22-40 gpm	22-40 gpm
Operating Pressure (PSI)	2,500 - 3,000	2,500 - 3,000	2,500 - 3,000	2,500 - 3,000	2,500 - 3,000
Overall Width	52"	65"	65"	65"	65"
A. Overall Height	32"	35"	35"	35"	35"
B. Overall Length	44"	50"	50"	50"	50"
C. Cutting Depth	0" - 5"	0" - 5"	0" - 5"	0" - 5"	0" - 5"
Tilt Degrees	+/- 11°	+/- 8°	+/- 8°	+/- 8°	+/- 8°
Drum Diameter	19"	22"	22"	22"	22"
Number of Picks	37	45	57	69	89

COMPATIBILITY

COMPATIBILITY	PART NUMBER	WEIGHT	SSL						CTL			CWL			
			TS50R	TS60R	TS50V	TS60V	TS70R	TS70V	TS80R-2	TS80V-2	TL8	TL10	TL12	TW40	TW65-2
12" Cold Planer - Low Flow - 12-22 gpm	ACP12-1222	1,500 lbs.	*4	*4	*4	*4	*4	*4		●	●	●			
18" Cold Planer - High Flow - 31-35 gpm	ACP18-3135X	2,200 lbs.							*3,4	*3,4	*3	*3			
24" Cold Planer - High Flow - 36-44 gpm	ACP24-3644X	2,400 lbs.									*3	*3			
30" Cold Planer - High Flow - 36-44 gpm	ACP30-3644X	2,600 lbs.									*3	*3			
40" Cold Planer - High Flow - 36-44 gpm	ACP40-3644X	3,100 lbs.									*3	*3			

*3 = Compatible with High Flow Option

*4 = Requires additional controls and/or electric control box