

TAKEUCHI

Attachment Catalog Brooms



Takeuchi, the right choice in attachments

Mulchers, Stump Grinders, Buckets, Grapples, Augers, Brooms, and many more options to fit all your application needs.

Takeuchi Attachment Catalog

Table of Contents

86	BROOMS
88	Pick-Up Broom
90	Angle Broom



Brooms



Pick-Up Broom

TPUB72 / TPUB84

72" - 84"
Available Widths

15 - 25 GPM
Recommended
Flow Rate

Greater Than **1,500 lb**
Recommended Loader Capacity



Pin Adjustment System

Utilizes pins with multiple holes which allows the operator to quickly and easily set bristly height. Easier and longer lasting than a bolt and nut.



XL Greaseable Bearing


2" diameter and greaseable bearing for longer wear life.

Poly/Wire Bristles

Commercial-grade 26" bristles for longer wear life.

Easy Wafer Exchange

Wafers can be replaced quickly and easily without disconnecting the hydraulic hoses.

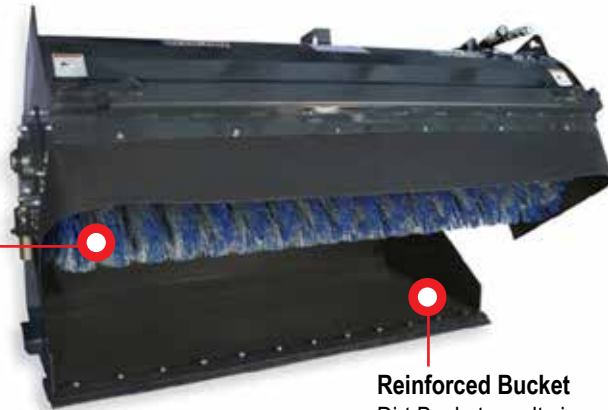

Reinforced Bucket

Dirt Bucket results in long term performance.

Direct Drive Motor

USA made Eaton® motor with hydraulic pressure relief protection ensures optimum performance and longevity. Allows forward and reverse operation.



Guarded Motor

Motor is guarded while allowing easy access for maintenance.



Optional Water Kit

- 30-gallon tank provides 20 minutes of continuous operation
- 12 volt, 2.1 GPM maximum pump with wiring harness
- Bolt-on accessory for Pick-Up Broom only. Includes all required components.

MODEL SPECS	TPUB72	TPUB84
Available for	TPUB72	TPUB84
Increased Depth	6"	6"
Spray Width	31.3"	31.3"
Number of Nozzles*	5	6
Approximate Weight, Empty	111 lb	117 lb
Recommended Loader Capacity	Greater than 1,500 pounds*	


*Number of nozzles on spray bar. Use on Gutter Brush would add on nozzle.



Optional Gutter Brush

- Increases cleaning width by 12"
- Adjustable hydraulic valve to control brush speed
- Can be secured in storage position without removal


MODEL SPECS	TPUB72	TPUB84
Increased sweeping Width, Straight	12"	
Increased Depth	28"	



Replacement Wafer Pack

- 8.125"/26" (I.D./O.D.) diameter poly/wire wafers
- For Takeuchi Pick-Up Brooms Only

Pick-Up Broom - Wafer Pack		
Model	Qty	Weight
TPWC72	35	82 lb
TPWC84	41	96



Replacement Edge Kit

- 5/8"x6" reversible double bevel steel edge
- For Takeuchi Pick-Up Brooms Only

Edge Kit - PUB VBWB	
Model	Weight
TUBEK72	82 lb
TUBEK84	96 lb



WARNING: Proposition 65 - See back cover for details

MODEL SPECS	TPUB72	TPUB84
Sweeping Width	72"	84"
Overall Width	79.8"	91.8"
Overall Height	31.3"	31.3"
Overall Depth	62.4"	62.4"
Number of 26" Diameter Wafers	35"	41"
Recommended Flow Rate	15-25 GPM Standard Flow Only	
Approximate Weight	1,120 lb	1,250 lb
Recommended Loader Capacity	Greater than 1,500 pounds*	

*Recommended Loader Capacity with Water Kit Installed is 1,800 pounds

Angle Broom

TVAB72HA / TVAB84HA / TVAB96HA

72" - 96"
Available Widths

15 - 25 GPM
Recommended
Flow Rate

Greater Than **1,500 lb**
Recommended Loader Capacity

Easy Wafer Exchange

Wafers can be replaced quickly and easily without disconnecting the hydraulic hoses.

Direct Drive Motor

USA made Eaton® motor with hydraulic pressure relief protection ensures optimum performance and longevity. Allows forward and reverse operation.

Guarded Motor

Motor is guarded while allowing easy access for maintenance.




Heavy-Duty Storage Stands

Flip down for easy storage and bristle protection. No pins required.



Centering Swing Linkage

Swing linkage system with multiple pivot points better centers broom in front of the loader when angled.




MODEL SPECS	TVAB72HA	TVAB84HA	TVAB96HA
Sweeping Width, Straight	72"	84"	96"
Sweeping Width, Full Angle	64.2"	74.8"	85.5"
Overall Width	81.1"	93.1"	105.1"
Overall Width, Full Angle	83.9"	94.3"	105.4"
Broom Angle	27°	27°	27°
Overall Height / Depth, Straight	34" / 74"	34" / 74"	34" / 74"
Number of 32" Diameter Wafers	35	41	47
Recommended Flow Rate	15-25 GPM Standard Flow Only		
Approximate Weight	1,035 lb	1,095 lb	1,160 lb
Recommended Loader Capacity	Greater than 1,500 pounds		



Hydraulic Angle

- One-cylinder design using an electric control valve
- 2 1/2" bore, 8" stroke cylinder with a NitroSteel® rod
- Greasable 1 1/4" cylinder and 1 9/16" linkage pins



- ### Replacement Wafer Pack
- 10" / 32" (I.D./O.D.) diameter poly/wire wafers
 - For Takeuchi Angle Brooms Only

Angle Broom - Wafer Pack		
Model	Qty	Weight
TAWC72	35	144 lb
TAWC84	41	168 lb
TAWC96	47	192 lb

TAKEUCHI

Attachment Catalog Brooms

PROPOSITION 65



WARNING: This product can expose you to chemicals including Cadmium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

US Headquarters

Pendergrass, Georgia

706.693.3600

Info@takeuchi-us.com

takeuchi-us.com

© 2021 Takeuchi Manufacturing [U.S.], Ltd. All Rights Reserved. Printed in the U.S.A. In accordance with our established policy of continued improvement, specifications and features are subject to change without notice. Pictures may show optional equipment.

FORM: Attachment Catalog, Brooms Apr. 2021