Takeuchi

Attachment Catalog Snow Removal



Takeuchi, the right choice in attachments

Mulchers, Stump Grinders, Buckets, Grapples, Augers, Brooms, and many more options to fit all your application needs.



Takeuchi Attachment Catalog

Table of Contents

- 70 SNOW REMOVAL
 72 Angle Snow Blades
 74 V Snow Blades

- Snow Blowers
- 78 Snow Buckets 80 Low Profile Snow Pushers
- Snow Pusher
- 84 Steel Edge Snow Pusher



Angle Snow Blade

TSBS84 / TSBS96 / TSBS108

Greater Than 1,500 lb Recommended Loader Capacity

O Hydraulic Crossover Relief Valve

Features hydraulic crossover relief valve, which protects the attachmnet b absorging shock by angling the entire blade if a curb or other object is hit.

- Design allows the blade to angle +/- 30° in either direction to windrow snow.
- Trip edge protects operator and equipment. Reversible, replaceable steel cutting edge.
- Side-to-side oscillation allows the blade to maintain constant contact with uneven


MODEL SPECS	TSBS84	TSBS96	TSBS108
Width: Overall, Straight / Full Angle	86" / 74"	98" / 84"	110" / 95"
Overall Height	31"	31"	31"
Overall Depth, Straight	37.5"	37.5"	37.5"
Blade Angle	(+/-) 30°	(+/-) 30°	(+/-) 30°
Moldboard Thickness	0.19"	0.19"	0.19"
Cutting Edge	5/8" x 8" Bolt-on	5/8" x 8" Bolt-on	5/8" x 8" Bolt-on
Blade Oscillation	(+/-) 40	(+/-) 4 ⁰	(+/-) 4 ⁰
Cylinder Bore / Stroke	2" / 8.375"	2" / 8.375"	2" / 8.375"
Cylinder Pins / Hinge Pins Diameter	1.25" / 1.563"	1.25" / 1.563"	1.25" / 1.563"
Approximate Weight	1,075 lb*	1,130 lb*	1,185 lb*
Recommended Loader Capacity		Greater than 1,500 pounds	


^{*}Weight with steel edge installed.



Options and Replacement Parts

Pin-on Wings for SBS,SBV	Model	Width	Weight
	TWGS	12"	145 lb





Angle Snow Blade Steel Edge Kit	Model	Weight
	TSEK84	116 lb
	TSEK96	134 lb
	TSEK108	154 lb



Angle Snow Blade Poly Edge Kit	Model	Weight
	TSBS84PYK	32 lb
	TSBS96PYK	36 lb
	TSBS108PYK	41 lb

- · Replaces standard steel cutting edge.
- 1" x 7 3/4 " reversible, replaceable, reprocessed UHMW polyethylene allows 5 1/4" of total wear.



Angle Snow Blade Rubber Edge Kit	Model	Weight
	TSBS84RK	103 lb
	TSBS96RK	117 lb
	TSBS108RK	131 lb

- · Replaces standard steel cutting edge.
- 1 1/2" x 10 " reversible, replaceable, rubber edge allows 7" of total wear.



Snow Blade Washer, Pin, Shoe	Model	Description	Qty	Weight
	T6862PP	Washer	1	0.2 lb
	T6863PP	Pin	1	0.2 lb
	T6854PP	Shoe	1	7 lb

V Snow Blade

TSVB84 / TSVB96 / TSVB108

Blade Height

1,065 - 1,390 lb Óverall Weight (varies by model)

Greater Than 1,500 lb Recommended Loader Capacity



Two Bolt-On Edges

5/8" x 8" reversible, replaceable steel edges allow 5 1/2" of total wear.

Trip Edge Protection

Protects operator and equipment.

Hyd. Sequence Relief Valves Help to protect the attachment by transferring shock from one

wing to another when curbs or objects are hit.



Jakeuchi

Allows the blade to maintain constant contact with uneven surfaces.




Floating Frame Link

Maintains full blade contact when in scoop and V positions, while allowing full down pressure in straight and angled positions.

MODEL SPECS	TSVB84	TSVB96	TSVB108
Width: Overall, Straight / Full Angle	86" / 74"	98" / 84"	110" / 95"
Width: Full Scoop / Full V	70" / 76"	81" / 88"	92" / 99"
Blade Height	31"	31"	31"
Overall Depth, Straight / Full V	43.5" / 41"	43.5" / 41"	43.5" / 41"
Blade Angle	(+/-) 30°	(+/-) 30°	(+/-) 30°
Moldboard Thickness	0.19"	0.19"	0.19"
Edge: Cutting / Center	5/8" x 8"	Bolt-on / 1/2" High Tensile Stee	el, Bolt-on
Blade Oscillation	(+/-) 4 ⁰	(+/-) 40	(+/-) 40
Float Link Angle	(+/-) 5 ⁰	(+/-) 5 ⁰	(+/-) 5 ⁰
Cylinder Bore / Stroke	2" / 8.375"	2" / 8.375"	2" / 8.375"
Cylinder Pins / Hinge Pins Diameter	1.25" / 1.563"	1.25" / 1.563"	1.25" / 1.563"
Approximate Weight	1,240 lb*	1,295 lb*	1,350 lb*
Recommended Loader Capacity		Greater than 1,500 pounds	
*Weight with steel edge installed.			


Options and Replacement Parts

Pin-on Wings for SBS,SBV	Model	Width	Weight
	TWGS	12"	145 lb



• Brackets bolt to the snow blade moldboard and two pins mount each wing to the bracket.

Snow Blade Steel Edge Kit	Model	Weight
	TVEK84	151 lb
	TVEK96	167 lb
	TVEK108	185 lb



Snow Blade Poly Edge Kit	Model	Weight
	TSBV84PYK	34 lb
	TSBV96PYK	39 lb
	TSBV108PYK	43 lb

• Replaces standard steel cutting edge.

• 1" x 7 3/4 " reversible, replaceable, reprocessed UHMW polyethylene allows 5 1/4" of total wear.



Takeuchi Attachment Catalog

Snow Blade Washer, Pin, Shoe	Model	Description	Qty	Weight
	T6862PP	Washer	1	0.2 lb
	T6863PP	Pin	1	0.2 lb
	T6854PP	Shoe	1	7 lb




Snow Blower

TVBWB72-25

Max Throwing | Cut Height | Distance

16 to 25 GPM One Motor Option Standard Flow Only

Greater Than 1,500 lb Recommended Loader Capacity

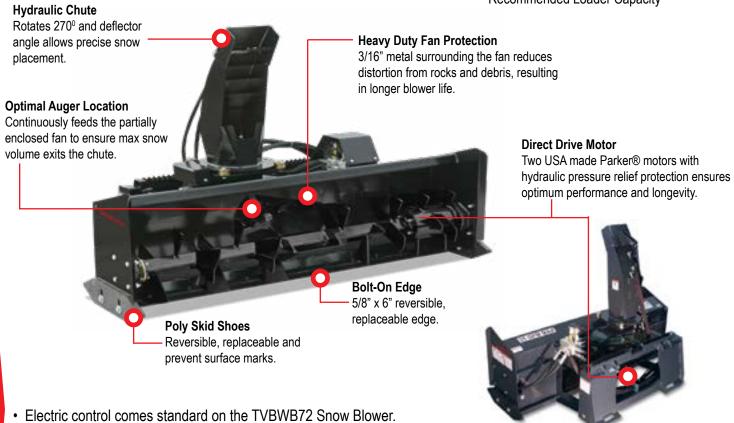

MODEL SPECS	TVBWB72-25
Overall Width / Cut Width	75.9"
Height Max with Chute / Cut	58.4" / 23.5"
Overall Depth	39.8"
Fan: Diameter / Depth	20" / 7.2"
Auger Diameter	16"
Throwing Distance	Up to 30'
Recommended Flow Rate	16 to 25 GPM
Approximate Weight	990 lb
Recommended Loader Capacity	Greater than 1,500 lb

Edge Kit - PUB \	/BWB	Model	Weight
		TUBEK72	72 lb
		TUBEK85	85 lb
Poly Shoe Kit	Model	Weight	Qty
	TBWPYSK	9 lb	Pair


Takeuchi



14 to 42 GPM Max Throwing | Cut Height | Four Motor Options Distance High Flow Availale Greater Than 1,500 lb

TVBW72 / TVBW84

Snow Blower

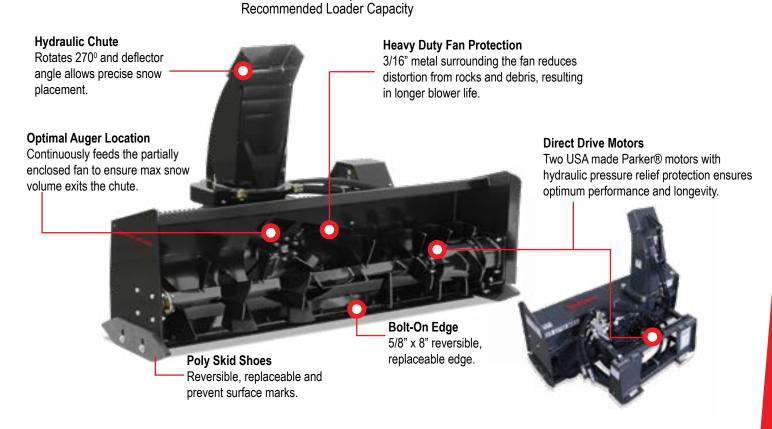

Electric control comes standard on the TVBW72 & TVBW84 Snow Blowers.

MODEL SPECS	TVBW72	TVBW84	TVBW84-HF33	TVBW84-HF42
Overall Width / Cut Width	77"	89"	88.1"	88.1"
Height Max with Chute / Cut	65" / 28"	65" / 28"	58.4"	58.4"
Overall Depth	47.9"	47.9"	39.8"	39.8"
Fan: Diameter / Depth	24" / 8"	24" / 8"	20"	20"
Auger Diameter	18"	18"	16"	16"
Throwing Distance	Up t	o 40'		
Recommended Flow Rate: Stawndard / High	14-25 GPM	/ 25-42 GPM	33 GPM	/ 42 GPM
Approximate Weight	1,220* lb	1,300* lb	1,065 lb	1,065 lb
Recommended Loader Capacity		Grea	ater than 1,500 lb	
*High flow motor options add approximately 75 lb to n	nodel weight.			

Edge Kit - PUB \	/BWB	Model	Weight
		TBWEK72	99 lb
		TBWEK84	111 lb
Poly Shoe Kit	Model	Weight	Qty
·	TRWPYSK	9 lh	Pair

Snow Buckets / Light Material

TMSHV84 / TMSHV96 / TMSHV101

84" to 101"Available Widths

Up to **44 cu. ft.**Struck Capacity
(varies by model)


Greater Than **1,800 lb**Recommended Loader Capacity



- High capacity design allows large volumes of snow, mulch or other light materials to be hauled per load.
- 3/16" thick shell and 1/4" side plates.
- Two, 3/8" thick vertical braces inside bucket make it more rigid.
- 3/8" thick side edges and gussets for extra durability.
- 8" tall windows cut into the back to increase operator visibility.


MODEL SPECS	TMSHV84	TMSHV96	TMSHV101
Width: Overall / Inside	85.5" / 83.3"	97.5" / 95.3"	101.5" / 99.3"
Overall Height	29"	29"	29"
Depth: Overall / Inside	40.6" / 39.9"	40.6" / 39.9"	40.6" / 39.9"
Window Height	8"	8"	8"
Capacity: Struck / Heaped (Cubic Feet)	31.0 cu. ft. / 37.2 cu. ft.	35.5 cu. ft. / 42.6 cu. ft.	37 cu. ft. / 44.5 cu. ft.
Bucket Back Angle	66°	66 ⁰	66°
Shell Thickness	.19"	.19"	.19"
Side Plate Thickness	.25"	.25"	.25"
Structural Wear Bars Under Bucket (1/2" x 4")	5	5	5
Approximate Weight	765 lb	830 lb	850 lb
Recommended Loader Capacity		Greater than 1,800 pounds	3

Bolt-on Edge Installed	Model	Holes/Bots	Weight
	TBEV84A	14	113 lb
	TBEV96A	16	129 lb
	TBEV101A	17	133 lb



Snow Buckets / Light Material

TSBHV84 / TSBHV96 / TSBHV101

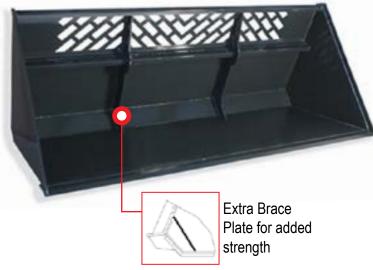

- High capacity design allows large volumes of snow, mulch or other light materials to be hauled per load.
- 1/4" thick shell and side plates.
- Two, 1/2" thick verti cal braces inside bucket make it more rigid.
- 3/8" thick side edges and gussets fro extra durability.
- 12" tall windows cut into the back to increase operator visibility.
- 3/4" x 6" weld-on cutting edge with holes for optional Bolt-0n Edge.

MODEL SPECS	TMSHV84	TMSHV96	TMSHV101
Width: Overall / Inside	85.5" / 83.3"	97.5" / 95.3"	101.5" / 99.3"
Overall Height	40.5"	40.5"	40.5"
Depth: Overall / Inside	45.5" / 43.5"	45.5" / 43.5"	45.5" / 43.5"
Window Height	12"	12"	12"
Capacity: Struck / Heaped (Cubic Feet)	43.2 cu. ft. / 51.8 cu. ft.	49.4 cu. ft. / 59.3 cu. ft.	52.2 cu. ft. / 62.6 cu. ft.
Bucket Back Angle	66°	66°	66°
Shell Thickness	.25"	.25"	.25"
Side Plate Thickness	.25"	.25"	.25"
Structural Wear Bars Under Bucket (1/2" x 4")	5	5	5
Approximate Weight	1,030 lb	1,180 lb	1,250 lb

Greater than 2,400 pounds

Bolt-on Edge Installed	Model	Holes/Bots	Weight
	TBEV84A	14	113 lb
	TBEV96A	16	129 lb
	TRFV101A	17	133 lh

84" to 101" Available Widths

Recommended Loader Capacity

Up to **52 cu. ft.**Struck Capacity
(varies by model)

Greater Than **2,400 lb** Recommended Loader Capacity



Low Profile Snow Pusher

TLSWP84 / TLSWP96 / TLSWP108



Allows the pusher to maintain constant

contact with uneven surfaces.



MODEL SPECS	TLSWP84	TLSWP96	TLSWP108
Width: Overall / Inside	92.3" / 86"	104.3" / 98"	116.3" / 110"
Overall Height	27.5"	27.5"	27.5"
Depth: Overall / Inside	39.5" / 30"	39.5" / 30"	39.5" / 30"
Pusher Ocillation	(+/-) 4 ⁰	(+/-) 4 ⁰	(+/-) 4 ⁰
Cutting Edge		1 1/2" x 10" Rubber	
Approximate Weight	915 lb	960 lb	1,005 lb
Recommended Loader Capacity		Greater than 1 500 pounds	

Snow Pusher Rubber Edge Kit	Model	Weight
	TSWP84RK	98 lb
	TSWP96RK	112 lb
	TSWP108RK	126 lb

• 1 1/2" x 10" reversible rubber edge.

Snow Pull Back Rubber Edge Kit	Model	Weight
	TSPP84RK	98 lb
	TSPP96RK	112 lb
• 1 1/2" x 10" reversible rubber edge.	TSPP108RK	126 lb



Snow Pusher Pull Back	- SEE	-
		• Enables pre buildings, ve

•	Enables precise snow cleanup along
	buildings, vehicles, etc.

• 1 1/2" x 10" reversible, replaceable rubber edge allows 6" of total wear.

Description	TSPP84	TSPP96	TSPP108
Overall Pull Back Width	88"	100"	112"
Inside Pull Back Width	86"	98"	110"
Cutting Edge	1	1/2" x 10" Rubb	per
Approximate Weight	210 lb	235 lb	255 lb

Snow Pusher

TTSWP84 / TSWP96 / TSWP108



40.8" Pusher Height


1,305 to 1,465 lb Overall Weight (varies by model)

Greater Than **1,800 lb**Recommended Loader Capacity

Edge never needs adjusting; it only needs to be reversed or replaced. 6" of total wear.

Rubber Edge


1 1/2" x 10" reversible, replaceable rubber edge with 6" of total wear. Ideal for clearing fresh snow and slippery, icy residue.



1/2" thick x 3" wide skid shoes float to allow full down pressure on the cutting edge.

Floating Frame Link

Compliments the oscillation and helps the pusher maintain constant contact with uneven surfaces.

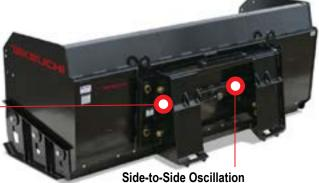

Allows the pusher to maintain constant contact with uneven surfaces.

Snow Pusher Pull Back



• Enables precise snow cleanup along buildings, vehicles, etc.

• 1 1/2" x 10" reversible, replaceable rubber edge allows 6" of total wear.

Description	TSPP84	TSPP96	TSPP108
Overall Pull Back Width	88"	100"	112"
Inside Pull Back Width	86"	98"	110"
Cutting Edge	1	1/2" x 10" Rubb	per
Approximate Weight	210 lb	235 lb	255 lb



MODEL SPECS	TSWP84	TSWP96	TSWP108
Width: Overall / Inside	90" / 86"	102" / 98"	114" / 110"
Overall Height	40.8"	40.8"	40.8"
Depth: Overall / Inside	51.2" / 38.3"	51.2" / 38.3"	51.2" / 38.3"
Pusher Ocillation	(+/-) 4 ⁰	(+/-) 4 ⁰	(+/-) 4 ⁰
Frame Link Float	3"	3"	3"
Cutting Edge		1 1/2" x 10" Rubber	
Approximate Weight	1,305 lb	1,365 lb	1,425 lb
Recommended Loader Capacity		Greater than 1,800 pounds	

Replacement Rubber Edge Kit	Model	Weight
	TSWP84RK	98 lb
	TSWP96RK	112 lb
• 1 1/2" x 10" reversible rubber edge.	TSWP108RK	126 lb

Replacement Pull Back Rubber Edge Kit	Model	Weight
	TSPP84RK	98 lb
	TSPP96RK	112 lb
	TSDD108DK	126 lb







Steel Edge Snow Pusher

TTSWP84 / TSWP96 / TSWP108



Floating Side Plates 1/2" thick x 3" wide skid shoes float to allow full down pressure on the cutting edge.

31.7" Pusher Height Greater Than 1,500 lb Recommended Loader Capacity

1,125 to 1,280 lb

Overall Weight

(varies by model)





MODEL SPECS	TSESP84	TSESP96	TSESP108
Width: Overall / Inside	92.5" / 86.5"	104.5" / 98.5"	116.5" / 110.5"
Overall Height	31.7"	31.7"	31.7"
Depth: Overall / Inside	54.4" / 32.2"	54.4" / 32.2"	54.4" / 32.2"
Pusher Ocillation	(+/-) 4 ⁰	(+/-) 4 ⁰	(+/-) 4 ⁰
Moldboard Thickness	0.19"	0.19"	0.19"
Cutting Edge		5/8" x 8" Steel	
Approximate Weight	1,210 lb	1,275 lb	1,340 lb
Recommended Loader Capacity	Greater than 1,500 pounds		



	MAKE	1000		
Description	TSEP84	TSEP96	TSEP108	
Overall Pull Back Width	86"	98"	109.9"	

97.4"

5/8" X 8" Steel

295 lb

109.4"

325 lb


•	Enables precise snow cleanup
	along buildings and other objects

- 5/8" x 8" reversible, replaceable steel edge allows 5 1/2" of total
- Easy installation on Takeuchi Steel Edge Snow Pusher.

Replacement Steel Edge Kit*	Model	Weight
	TSEPEK84	111 lb
	TSESPEK96	129 lb
	TSESPEK108	149 lb

85.4"

265 lb



Inside Pull Back Width


Approximate Weight

Cutting Edge

Replacement Pull Back Steel Edge Kit*	Model	Weight
	TSEPK84	111 lb
	TSEPEK96	129 lb
	TSEPEK108	149 lb

• 5/8" x 8" reversible double bevel steel edge.

*NOTE: Snow Pusher and Pull Back of the same width use the same steel part(s), but different mount hardware.



Takeuchi

Attachment Catalog Snow Removal

PROPOSITION 65



WARNING: This product can expose you to chemicals including Cadmium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

US Headquarters

Pendergrass, Georgia 706.693.3600 Info@takeuchi-us.com takeuchi-us.com

© 2021 Takeuchi Manufacturing [U.S.], Ltd. All Rights Reserved. Printed in the U.S.A. In accordance with our established policy of continued improvement, specifications and features are subject to change without notice. Pictures may show optional equipment. FORM: Attachment Catalog, Snow Removal Apr. 2021